


Introduction

Many applications require high-speed memory that must be shared by two processes. Using dual-port RAM allows each process to simultaneously access the shared memory through two separate ports, as shown in Figure 1.

Figure 1. Dual-Port RAM Block Diagram

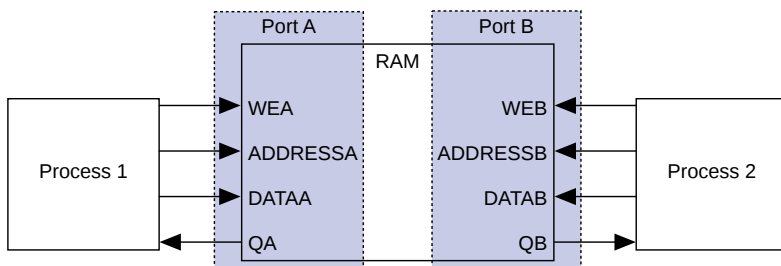

In this application note, port A and port B represent the two groups of address, data, and control signals in the RAM block.

Altera's FLEX 10K embedded programmable logic device (PLD) family is well suited for implementing dual-port RAM because it has a high memory capacity. Each FLEX 10K device contains a logic array for implementing general logic, and an embedded array for implementing memory and specialized logic functions. The embedded array is composed of embedded array blocks (EABs). Each FLEX 10K EAB contains 2,048 bits of RAM. Multiple EABs can be combined to create larger blocks of memory without affecting performance. When implementing dual-port RAM in FLEX 10K devices, one or more EABs provide the high-speed memory, and all other required logic is implemented in the logic array.

Two types of dual-port RAM can be implemented in FLEX 10K devices: arbitrated and cycle-shared. Arbitrated dual-port RAM is useful for designs that do not require both ports to frequently access the shared memory at the same time. Arbitrated dual-port RAM requires complex arbitration circuitry, but uses only one Clock. In contrast, cycle-shared dual-port RAM allows two processes to simultaneously access the shared memory through two separate ports. Cycle-shared dual-port RAM requires two Clocks, and conserves device resources because it does not require complex arbitration circuitry.

This application note describes how to implement cycle-shared dual-port RAM in FLEX 10K devices.



Cycle-Shared Dual-Port RAM


For more information about the FLEX 10K architecture, go to the [*FLEX 10K Embedded Programmable Logic Family Data Sheet*](#).

FLEX 10K devices use cycle-sharing to offer true dual-port RAM. To implement cycle-sharing, the EAB must be clocked at twice the frequency of the rest of the system, which allows both processes to access the dual-port RAM within one system Clock cycle.

Figure 2 shows how cycle-shared dual-port RAM is implemented in FLEX 10K devices.

Figure 2. FLEX 10K Cycle-Shared Dual-Port RAM Block Diagram

You can use the parameterized *csdpram* megafunction in MAX+PLUS II to set the address, data, and output ports to variable widths. See “Software Support” on page 5 for more information.

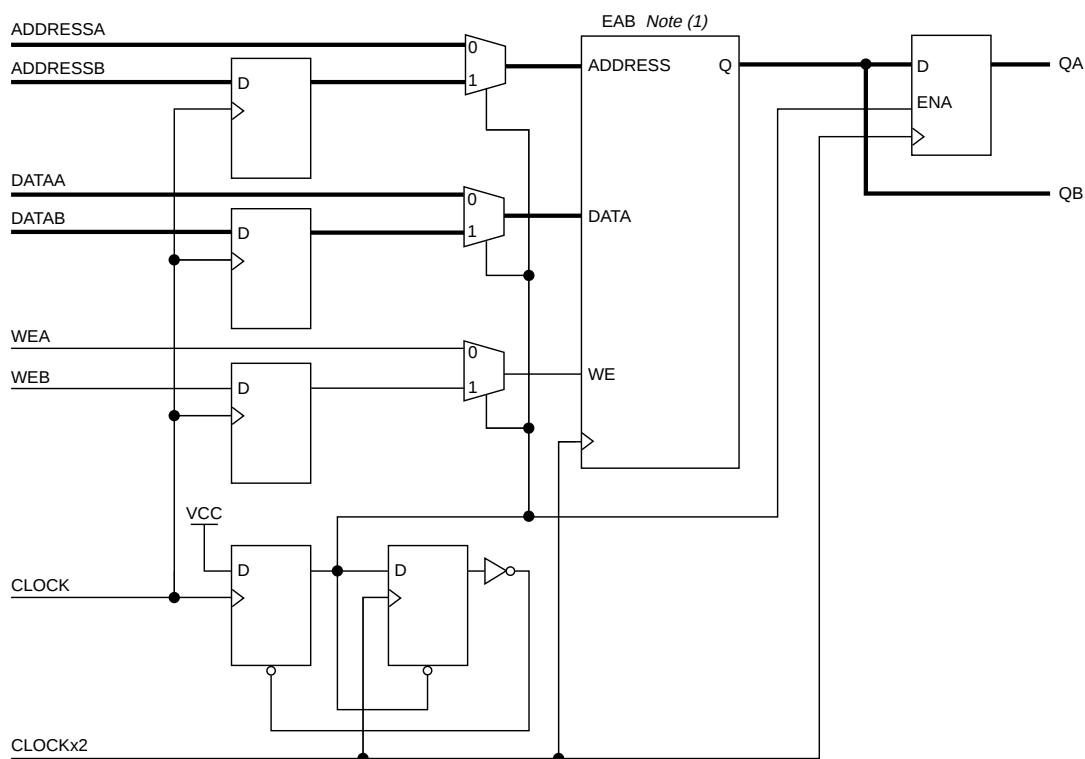**Note:**

(1) Multiple EABs can be combined to create larger RAM.


Before the rising edge of the first *clockx2* cycle, the address, data, and Write Enable (*we*) inputs of port A are multiplexed onto the corresponding inputs of the EAB. If the *we* signal is asserted, the rising edge of *clockx2* triggers the write pulse circuit within the EAB. Then, the value of the *dataa* input is written to the EAB at the address specified by the *addressa* input. If the *we* signal is not asserted, the EAB drives out the data stored at the address specified by *addressa*. The data for port A is latched at the EAB output by a register on the second rising edge of *clockx2*.

On the rising edge of the first *clockx2* cycle, the data, address, and *we* inputs of port B are latched into registers, and are available on the rising edge of the second *clockx2* cycle.

Before the rising edge of the second clockx2 cycle, the address, data, and we inputs of port B are multiplexed onto the corresponding inputs of the EAB. If we is asserted, the rising edge of clockx2 triggers the write pulse circuit within the EAB. The value of the datab inputs is written to the EAB at the address specified by the addressb input. If we is not asserted, the EAB drives out the data stored at that address. Because it is not latched, the data from port B is always available to the system before the next rising edge of the system Clock signal.

Clock skew between the two user-supplied Clocks lowers the maximum operating frequency of the dual-port RAM. For example, a Clock skew of 2 ns adds 2 ns to the minimum Clock period. To accurately simulate this behavior, Clock skew must be included in the simulation vectors by introducing the two Clock sources as signals with a 2-ns delay; this Clock skew can be introduced in MAX+PLUS II. MAX+PLUS II simulation does not automatically show this reduction in performance because the Clock skew is generated external to the device. Figure 3 shows the functional waveform diagram for cycle-shared dual-port RAM in FLEX 10K devices.

Figure 3. FLEX 10K Cycle-Shared Dual-Port RAM Functional Waveforms

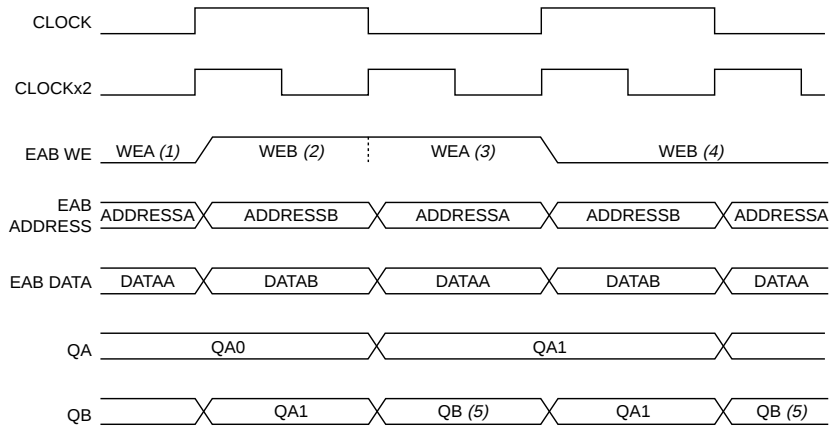

Notes:


- (1) When port A is requesting a read, wea = 0.
- (2) When port B is requesting a write, web = 1.
- (3) When port A is requesting a write, wea = 1.
- (4) When port B is requesting a read, web = 0.
- (5) qb is valid only at the end of cycle. The EAB output is not re-registered when it drives qb.

Collision

Collision occurs when both processes attempt to access the shared memory location at the same time. When port A and port B attempt to write data to the same memory address simultaneously, non-cycle-shared dual-port RAM requires complex arbitration circuitry to identify which process accesses the memory.

With cycle-shared dual-port RAM, if port A and port B write to the same address simultaneously, the data from port B is stored. If port A writes to the memory address that port B is reading, a busy signal informs the system that the data at that particular address has changed since the last Clock cycle. Figure 4 shows how the busy signal is generated.

Figure 4. Generation of Busy Signal



Software Support

You can implement cycle-shared dual-port RAM in FLEX 10K devices with a megafunction provided with Altera's MAX+PLUS II development system. The megafunction, `csdpram`, incorporates parameterized functions from the library of parameterized modules (LPM). The LPM is an architecture-independent library of logic functions that completely describes the logic operation of digital circuits. Because all LPM functions have configurable parameters, you can control the size of `csdpram` to meet your design requirements. Figure 5 shows the symbol for the `csdpram` megafunction.

The `csdpram` megafunction has the following parameters:

- `LPM_WIDTH` is the word size of the dual-port RAM.
- `LPM_WIDTHAD` is the number of address lines in the dual-port RAM.
- `LPM_NUMWORDS` is the depth of the dual-port RAM. If `LPM_NUMWORDS` is not specified, the `csdpram` depth defaults to $2^{\text{LPM_WIDTHAD}}$.

Figure 5. *csdpram* Megafunction Symbol

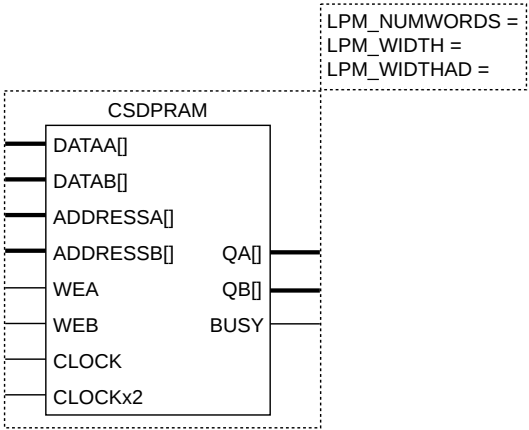


Table 1 lists the input and output ports of *csdpram*.

Table 1. <i>csdpram</i> Ports		
Pin Type	Ports	Description
Input	dataa	Data to be written to port A.
Input	dat ab	Data to be written to port B.
Input	wea	Write enable input to port A.
Input	web	Write enable input to port B.
Input	addressa	Memory address accessed by port A.
Input	addressb	Memory address accessed by port B.
Input	clock	System Clock.
Input	clockx2	Internal Clock of the dual-port RAM (must operate at twice the frequency of the system Clock).
Output	qa	Data output from port A.
Output	qb	Data output from port B. qb is valid only at the end of cycle.
Output	busy	Indicates addressa = addressb and wea is asserted.

Conclusion

You can use the FLEX 10K EAB to quickly and efficiently implement dual-port RAM and other memory functions. Altera's MAX+PLUS II development system provides the `csdpram` megafunction, which allows you to implement cycle-shared dual-port RAM and create flexible designs for a variety of applications.



2610 Orchard Parkway
San Jose, CA 95134-2020
(408) 894-7000
Applications Hotline:
(800) 800-EPLD
Customer Marketing:
(408) 894-7104
Literature Services:
(408) 894-7144

Altera, MAX, MAX+PLUS, and FLEX are registered trademarks of Altera Corporation. The following are trademarks of Altera Corporation: MAX+PLUS II and FLEX 10K. Altera acknowledges the trademarks of other organizations for their respective products or services mentioned in this document. Altera products are protected under numerous U.S. and foreign patents and pending applications, maskwork rights, and copyrights. Altera warrants performance of its semiconductor products to current specifications in accordance with Altera's standard warranty, but reserves the right to make changes to any products and services at any time without notice. Altera assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing by Altera Corporation. Altera customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services.

Copyright © 1996 Altera Corporation. All rights reserved.



I.S. EN ISO 9001